

08/25/00
JC923 U.S. PTO

08-29-00

PTO/SB/05 (4/98)
OMB 0651-0032
08/25/00
09/16/99 144

Please type a plus sign (+) inside this box → ☐

Approved for use through 09/30/2000. Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))	Attorney Docket No.	TRIN-210
	First Inventor or Application Identifier	Michael Kim
	Title	PERMANENT MAGNET ARRAY AND MAGNET...
	Express Mail Label No.	EL186212223US

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
---	--

<p>1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing)</p> <p>2. <input checked="" type="checkbox"/> Specification [Total Pages 14] (preferred arrangement set forth below)</p> <ul style="list-style-type: none">- Descriptive title of the Invention- Cross References to Related Applications- Statement Regarding Fed sponsored R & D- Reference to Microfiche Appendix- Background of the Invention- Brief Summary of the Invention- Brief Description of the Drawings (if filed)- Detailed Description- Claim(s)- Abstract of the Disclosure <p>3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 12] (informal)</p> <p>4. Oath or Declaration [Total Pages 2]</p> <p>a. <input checked="" type="checkbox"/> Newly executed (original or copy) - unsigned</p> <p>b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 16 completed)</p> <p>i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).</p> <p>* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).</p>	<p>5. <input type="checkbox"/> Microfiche Computer Program (Appendix)</p> <p>6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)</p> <p>a. <input type="checkbox"/> Computer Readable Copy</p> <p>b. <input type="checkbox"/> Paper Copy (identical to computer copy)</p> <p>c. <input type="checkbox"/> Statement verifying identity of above copies</p> <p>ACCOMPANYING APPLICATION PARTS</p> <p>7. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))</p> <p>8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee)</p> <p>9. <input type="checkbox"/> English Translation Document (if applicable)</p> <p>10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 [Copies of IDS Citations]</p> <p>11. <input type="checkbox"/> Preliminary Amendment</p> <p>12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)</p> <p>13. <input checked="" type="checkbox"/> * Small Entity Statement(s) filed in prior application, Status still proper and desired (PTO/SB/09-12)</p> <p>14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)</p> <p>15. <input checked="" type="checkbox"/> Other: Credit or debit our Deposit Acct. No. 12-1420 if necessary.</p>
---	---

16. If a **CONTINUING APPLICATION**, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label [] or ☒ Correspondence address below
(Insert Customer No. or Attach bar code label here)

Name	Douglas C. Limbach		
	LIMBACH & LIMBACH L.L.P.		
Address	2001 Ferry Building		
City	San Francisco	State	California
		Zip Code	94111-4262
Country	U.S.A.	Telephone	415-433-4150
		Fax	415-433-8716

Name (Print/Type)	Douglas C. Limbach	Registration No. (Attorney/Agent)	35,249
Signature	<i>Douglas C. Limbach</i>	Date	8-25-00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS (37 CFR 1.9(f) and 1.27(c)) - SMALL BUSINESS CONCERN

I hereby declare that I am

- ☐ the owner of the small business concern identified below:
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF CONCERN Trinity Flywheel PowerADDRESS OF CONCERN 6724D Preston Ave., Livermore, CA 94550

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled PERMANENT MAGNET ARRAY AND MAGNET HOLDER FOR FLYWHEEL MOTOR/GENERATOR by inventor(s) Michael Kim et al. described in

- ☒ the specification filed herewith with title as listed above.
☐ application no. , filed .
☐ patent no. , issued .

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed below* and no rights to the invention are held by any person, other than the inventor, who could not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27).

NAME _____

ADDRESS _____

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

NAME _____

ADDRESS _____

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time or paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING _____

TITLE OF PERSON OTHER THAN OWNER _____

ADDRESS OF PERSON SIGNING _____

SIGNATURE: _____

DATE: _____

005200-1154960

PATENT

**PERMANENT MAGNET ARRAY AND MAGNET HOLDER FOR
FLYWHEEL MOTOR/GENERATOR**

This application claims the benefit of U.S. Provisional Application
5 No. 60/151,236, filed August 27, 1999, entitled Permanent Magnet Array
And Holder For Flywheel Motor/Generator and U.S. Provisional
Application No. 60/152,453, filed September 3, 1999, entitled
Permanent Magnet Array And Holder For Flywheel Motor/Generator.

10

BACKGROUND OF THE INVENTION

The present invention pertains to the design and construction of
a permanent magnet electrical machine built into a flywheel rotor. The
electrical machine functions equally well as a motor or a generator and
15 is referred to as a flywheel motor/generator.

The magnets are located around the bore of a cylinder made
from composite material. The magnets working together create a field
within the rotor bore that excites stator windings when the cylinder is
20 rotating. This rotation of the magnetic field with respect to the stator
windings comprises the motor/generator function of converting electrical
energy to kinetic energy and vice versa.

An example of the state of the art of this type of machine is
25 described in U.S. Patent 5,705,902, incorporated herein by reference. A
cross section of the Halbach magnet array of the type used in this
patent is shown here in Figure 1A. The major axis of each magnet
segment is parallel to the centerline and axis of rotation of the rotor.

Several difficulties are encountered in the implementation of this magnet configuration.

1. High centrifugal forces result in high contact pressure between the magnet and the rotor.

2. Expansion of the rotor results in high circumferential strains on the magnet face contacting the inner bore of the rotor. The strain can be high enough to fracture the magnet material.

3. Expansion of the rotor results in the concentration of rotor stress both between magnet segments and directly 'underneath' (radially outward from the center of) each segment.

4. If a simple cylindrical rotor bore is used, the magnet segments must use a shape with the direction of magnetic polarization varying from segment to segment. Except for the special case where cylindrical bar segments are used, it is not possible to use a magnet segment of a single design and this results in higher manufacturing cost.

Summary of the Invention

Some unique aspects of the invention are the magnet shapes that are used, the liner/retainer configuration used to secure the magnets, and the construction of the rotor in the immediate vicinity of the magnets. The principal functions of the design are (1) managing stresses in the rotor and the magnets at high speed when centrifugal acceleration can exceed 100,000 g's and (2) securing the magnets when the assembly is at rest, when magnets that are not properly secured can reposition themselves in deleterious ways through mutual attraction or repulsion.

Square magnets that do not entirely fill the annular magnet region are the preferred embodiment although other bar shapes may be used. When square cross section magnets are used, the magnets are supported directly by the bore of the rotor. The arrays may be built to any useful axial length by stacking sets of segments where the sets are identical in cross section. Each bar in the cross section may comprise a number of shorter segments.

Brief Description of the Drawings

Fig. 1A is a top plan view showing arcuate magnet segments of the prior art forming a dipole Halbach Array.

Fig. 1B is a top plan view showing 24 square bar magnet segments forming a multiple pole Halbach Array.

Fig. 1C is a top plan view showing 16 square bar magnet segments forming a multiple pole Halbach Array.

Fig. 2 is a top plan view showing square magnets and a magnet holder inside a polygonal bore.

Fig. 3 is a top plan view showing square magnets and a magnet holder inside a round bore.

Fig. 4 is a top plan view showing cylindrical magnets forming a dipole Halbach Array.

Fig. 5 is a top plan view showing cylindrical magnets, a magnet retainer, and a liner inside a rotor bore.

Fig. 6 is a top plan view showing a first alternative embodiment to Fig. 5.

Fig. 7 is a top plan view showing a second alternative embodiment to Fig. 5.

Fig. 8 is a top plan view showing a third alternative embodiment to Fig. 5.

Fig. 9 is a top plan view showing a fourth alternative embodiment to Fig. 5.

Fig. 10 is a top plan view showing a magnet with anti-rotation flats.

5 Fig. 11A is a perspective view showing step features on each end of a magnet segment.

Fig. 11B is a perspective view showing groove features on each end of a magnet segment.

10 Detailed Description of the Preferred Embodiments

The flywheel rotor design is shown in cross section in Figure 2. This configuration shows 16 square magnets, symmetrically positioned about the rotor axis with uniform spacing. The configuration shows that
15 bars with just three distinctly different polarizations are sufficient to fully populate the 16 segment array. This combination produces a uniform dipole field. Surrounding the magnet array is a composite rotor, which may be wet-filament wound or wound using pre-preg tape or tow. The magnet holder encapsulates and holds the magnets in place. The
20 holder is thin but it is strong enough to maintain the magnet segments in proper position. The holder also keeps the magnets from rotating. The holder keeps broken magnet fragments from escaping into the flywheel surroundings. The holder should be stiff and low in mass.

25 Placement of permanent magnets into an assembly can be difficult since repulsive and attractive contact pressure can be over 80 psi. Assembly of arrays of high field magnets typically requires dedicated tooling to maintain control of segment position as they are brought into close proximity. The magnet holder used in this invention
30 also locates the components during assembly eliminating the need for dedicated tooling and simplifying the magnet assembly process.

Rotor construction here uses stronger, stiffer composite material at the mating surface to the magnets. This contrasts from the conventional practice of using low modulus materials at the bore of the rotor to reduce radial tensile stresses in thick rotors. The stiffer composite material at the bore reduces the radial growth of the rotor thereby reducing the strain on the magnets. Since high modulus material is typically stronger than low modulus material, use of high modulus material at the bore of the rotor strengthens the rotor where the stresses are highest. To minimize the number of unique magnet parts and to integrate a non-rotating index feature, square magnet design is used to produce the dipole magnetic field.

The wound composite rotor typically has very high hoop strength and stiffness. Because the holder is supported by the rotor, the holder can be made of much weaker material. The holder can be fabricated from conventional plastic (such as nylon), or reinforced thermoplastic (such as glass filled polycarbonate), or compression molded carbon fiber and epoxy. The choice of an optimum material depends on details of the holder configuration. The holder may be machined from solid stock or may be produced by compression molding or resin transfer molding.

Figure 2 also shows a composite rotor with polygonal inner bore. The flat sections of the rotor maintain the magnet's position. The rotor can be wound with the polygonal inner bore by using a polygonal winding mandrel.

Certain variation to the basic configuration is practical as shown in Figure 3:

Basic differences are:

Holder: The holder geometry is essentially the same whether the rotor has a cylindrical bore (as shown in Fig. 3) or a polygonal bore (as shown in Fig. 2). The portion of the holder that abuts the rotor is contoured to match the surface of the rotor.

5

Magnet shape: The magnets maintain the simple square bars configuration with one modification. A round radius is added to the square magnet shape. The radius on the magnet matches the radius of the inner bore. An advantage of this configuration is the lowering of the stress concentration present in the polygonal bore. The magnets are made from high field material such as NdFeB or Samarium Cobalt or are ceramic. They may be machined and ground to final shape from anisotropic stock or they may be sintered and compressed to near net shape with a higher degree of isotropy.

10

15

The holder configuration is also useful for higher order permanent magnet arrays such as the 12 pole, 24 magnet array shown in figure 1B. In this case, only one type of bar is required: a bar of square cross section that is transversely polarized.

20

Alternate Configurations

Many variations of the magnet and liner shape are practical. Cylindrical bars shown in Figure 4 offer the greatest flexibility. Useful variations for configuring the cylindrical bar and liner are listed as follows:

25

Liner. The liner geometry has a range of practical alternatives that achieve the same objective. One variable is the extent to which the liner surrounds the magnets. The liner may have a shallow recess (Figure 5 and 6), may partially surround the magnet (Figure 9), or may

30

fully surround the magnet (Figure 7 and 8). If the liner surrounds the magnets sufficiently, no additional retainer is required. Material that is not structurally useful may be removed from the liner resulting in a contoured shape as shown in Figure 8.

5

Magnet shape (variations of rounds bars). For this set of alternatives to square bars or square bars with an outboard radius, the magnets will be round bars with many possible geometric features. A criteria for the selection of a non-square bar magnet shape is that the bars are all of the same design. The only difference being that they are clocked differently during assembly to orient the magnetic field as necessary for performance of the flywheel motor/generator. The following shapes may be used: cylindrical, polygonal, and round with a locating features on the sides or end.

15

The magnets have antirotation features to hold the magnets securely and in the proper orientation during assembly. One example of such a feature is antirotation flats as shown in Figure 10. A magnet of this shape would have corresponding flats fabricated into the liner and retainer. The particular configuration shown in Figure 10 uses flats of the same width, but flats of different width could alternatively be used. This would permit a configuration that would allow assembly of each magnet into the liner and retainer with no ambiguity regarding orientation, eliminating assembly errors. A further derivative of this concept is to use a polygon with six or more sides.

25

An alternative to placing antirotation features on the sides of the magnets is to place antirotation features on the ends of each magnet. The preferred configuration is to use either a step or a groove as shown in Figures 11A and 11B, respectively. These features mate with corresponding features in the magnet holder. Each magnet in the

30

circular array can be of a single piece, or can comprise several magnet segments stacked end-to-end and axially aligned. When the steps shown in Fig. 11A are used, the step on an end of one magnet interlocks with the step on an adjacent magnet to keep the magnets aligned in the proper direction. When the grooves shown in Fig. 11B are used, dowels or bars, equal or shorter in length than the diameter of the magnets, are placed between the magnets to engage and align the two adjacent grooves.

10 The following is a summary of features of the preferred embodiments:

15 (1) The invention is an array of magnets made from high field material such as NdFeB or Samarium Cobalt or ceramic where the magnets are arranged in an annulus and secured by a non-magnetic holder.

 (2) The magnets are bars with the major axis of the bar parallel to the major axis of the rotor and the bars may be made up of shorter segments placed end to end.

20 (3) The bars bear directly on the composite surface or bear on a liner surface.

 (4) Where the bars bear directly on the bore of the rotor, the rotor is manufactured with high modulus composite along the bore which makes the rotor stronger at this high stress point and minimizes the circumferential tensile strain imposed by the rotor on the magnet and allows the rotor to operate at higher speed than would be attained without this feature. The bore of the rotor may be wet filament wound or manufactured using pre-preg tape or tow.

25 (5) The bars are secured against rotation by the non-magnetic holder or by end features in the bars.

PATENT

(6) The field produced by the magnet array is a dipole field or a field with a larger number of poles where the number of poles may be equal to but no greater than half the number of magnet bars.

5 (7) The bars may be substantially square in cross section or may be round or they may be polygonal.

(8) Square cross section bars may have flat sides or the surface of the bar contacting the rotor may be curved to precisely mate with the cylindrical bore of the composite rotor.

10 (9) Where square bars are used, the rotor may be wound on a polygonal mandrel to produce flat internal facets that locate and support the magnets.

(10) Round bars may have flats to engage with mating features in the holder to ensure proper alignment during assembly and to prevent rotation during operation.

15 (11) An array of 16 square bars will produce a uniform dipole field where there are three types of unique polarization direction for the bars and several (e.g. 4, 4, or 8) bars of each of these three polarization are used in the assembly.

20 (12) Each of the round bars in an array of round bars may have the same configuration.

(13) The magnet holder may be made from nylon, polycarbonate, or any strong plastic or and may be partially filled with carbon or glass fiber for additional strength or aluminum may be used.

25 (14) The magnet holder may be machined from solid stock or may be molded.

(15) The magnet holder positions the segments during assembly eliminating the need for magnet assembly tooling.

What is claimed as the invention is:

1. A circular permanent magnet array comprising:
a plurality of elongate magnets each having a longitudinal axis,
5 the magnets arranged around a common central axis of rotation with
the longitudinal axes located parallel to and radially offset from the axis
of rotation; and
a nonmagnetic magnet holder for maintaining the magnets in a
fixed position, the magnet holder being made of a material selected
10 from the group consisting of conventional plastic, reinforced
thermoplastic and compression molded fiber and epoxy.
2. The magnet array of claim 1, wherein the plurality of magnets
includes a first set having a predetermined number of magnets equally
15 spaced around the axis of rotation, and a second set having the same
predetermined number of magnets, each of the magnets of the second
set being axially aligned with a corresponding magnet in the first set.
3. The magnet array of claim 1, wherein all of the magnets are
20 rare earth magnets.
4. The magnet array of claim 1, wherein the magnet holder
includes a retainer generally surrounding each of the magnets, and a
separate sleeve-shaped liner located radially outward from and
25 surrounding the retainer.
5. The magnet array of claim 1, wherein the magnets each have
two ends and an alignment feature provided on at least one the ends to
locate the magnet in a predetermined orientation with respect to the
30 holder.

6. The magnet array of claim 5 wherein the alignment feature comprises a stepped portion.

5 7. The magnet array of claim 5 wherein the alignment feature comprises a groove.

8. The magnet array of claim 1 wherein each of the magnets is symmetrical about its longitudinal axis.

10 9. The magnet array of claim 1 wherein each of the magnets has a circular cross-section.

15 10. The magnet array of claim 1 wherein each of the magnets has a square cross-section.

11. An electric machine comprising:
a rotor having a first bore along a central axis of rotation thereof,
the first bore defining an inner surface of the rotor;
a plurality of elongate magnets located within the first bore
20 adjacent to the inner surface and arranged around the axis of rotation;
a magnet holder for securing the magnets to the rotor, the
magnet holder being a separate piece from the rotor and having a
second bore; and
a stator fixedly located within the second bore.

25 12. The electric machine of claim 11, wherein the rotor is a composite structure.

30 13. The electric machine of claim 11, wherein the plurality of magnets are located directly against the inner surface of the rotor.

PATENT

14. The electric machine of claim 12, wherein the inner surface of the rotor includes a substantially flat facet for each of the plurality of magnets.

5 15. The electric machine of claim 12, wherein the inner surface of the rotor has a predetermined radius and wherein the plurality of magnets each have a generally square cross-section with one side having a convex radius matching the predetermined radius.

10 16. The electric machine of claim 11, wherein the plurality of magnets includes a first set having a predetermined number of magnets equally spaced around the axis of rotation, and a second set having the same predetermined number of magnets, each of the magnets of the
15 second set being axially aligned with a corresponding magnet in the first set.

 17. The electric machine of claim 11, wherein all of the magnets are rare earth magnets.

20 18. The electric machine of claim 11, wherein the magnet holder includes a retainer generally surrounding each of the magnets, and a separate liner located between the magnets and the inner surface of the rotor.

25 19. The electric machine of claim 11, wherein the magnets each have two ends and an alignment feature provided on at least one the ends to locate the magnet in a predetermined orientation with respect to the holder.

PATENT

20. The electric machine of claim 19 wherein the alignment feature comprises a stepped portion.

21. The electric machine of claim 19 wherein the alignment
5 feature comprises a groove.

22. The electric machine of claim 11 wherein each of the magnets is symmetrical about its longitudinal axis.

10 23. The electric machine of claim 11 wherein each of the magnets has a circular cross-section.

24. The electric machine of claim 11 wherein each of the magnets has a square cross-section.

15 25. A method of assembling a rotor comprising the steps of:
inserting a generally sleeve-shaped magnet retainer into a central bore of a rotor, the retainer having a circular array of empty elongated cavities open at one end;
20 inserting an elongated magnet into each of the cavities; and
leaving the retainer and magnets in place within the bore as a permanent attachment to the rotor.


26. The method of claim 25 further comprising the step of
25 inserting a generally sleeve-shaped liner into the central bore of the rotor before inserting the magnet retainer.

ABSTRACT


The invention involves a flywheel motor/generator having a holder to maintain the permanent magnets in a circular array on the rotor.

- 5 Unique aspects of the invention include the magnet shapes that are used, the liner/retainer configuration used to secure the magnets, and the construction of the rotor in the immediate vicinity of the magnets. The principal functions of the design are 1) managing stresses in the rotor and the magnets at high speed when centrifugal acceleration can
10 exceed 100,000 g's, and 2) securing the magnets when the assembly is at rest when magnets that are not properly secured can reposition themselves in deleterious ways through mutual attraction or repulsion. Keying features are also provided on the ends of the magnets to aid in assembly of the rotor and to maintain the magnets in the proper
15 orientation.

005230" 117T54960

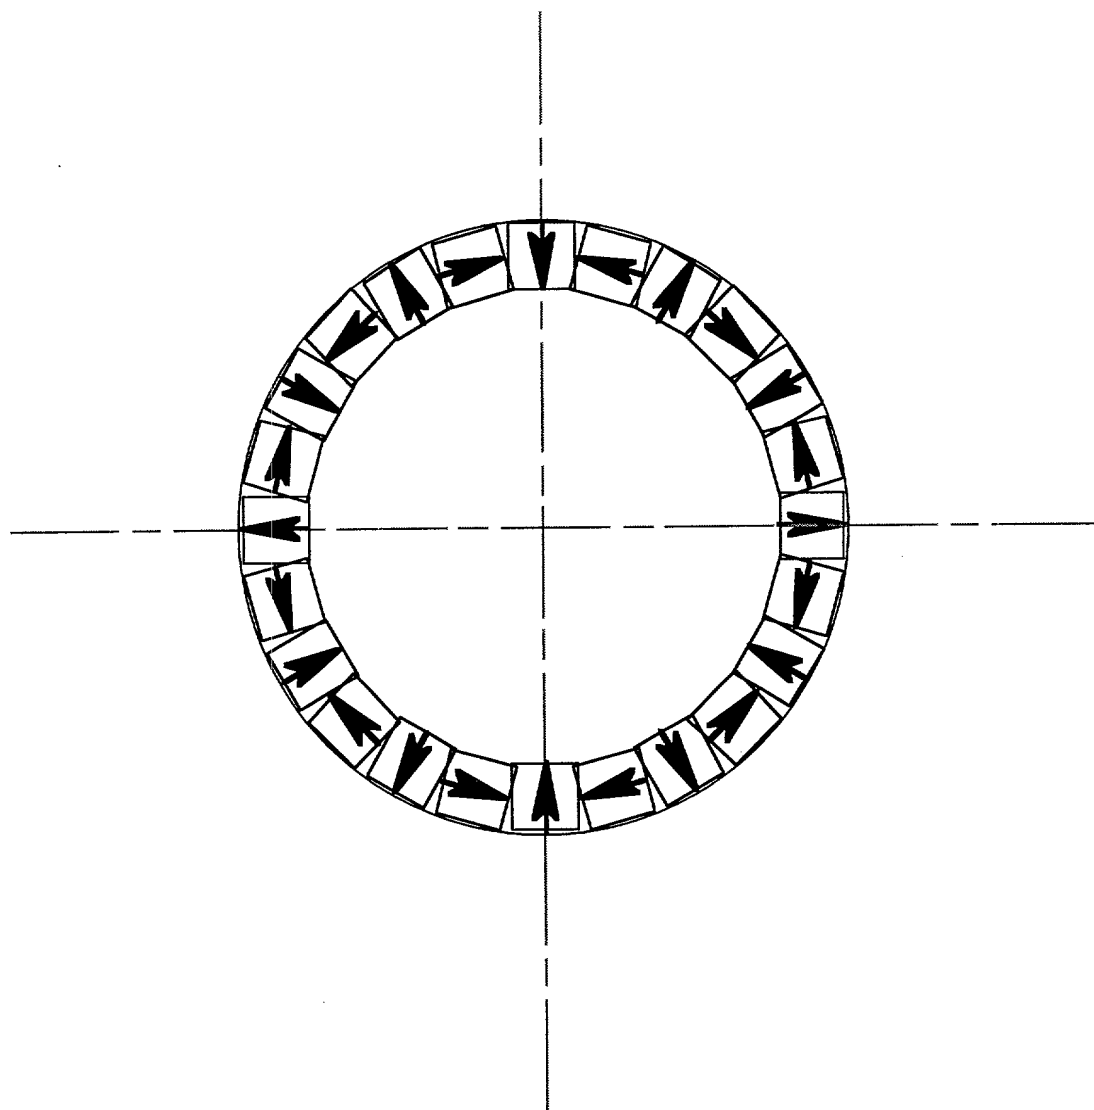

1B E
FIGURE 1a MULTIPLE POLE HALBACH ARRAY WITH SQUARE
SEGMENT MAGNETS

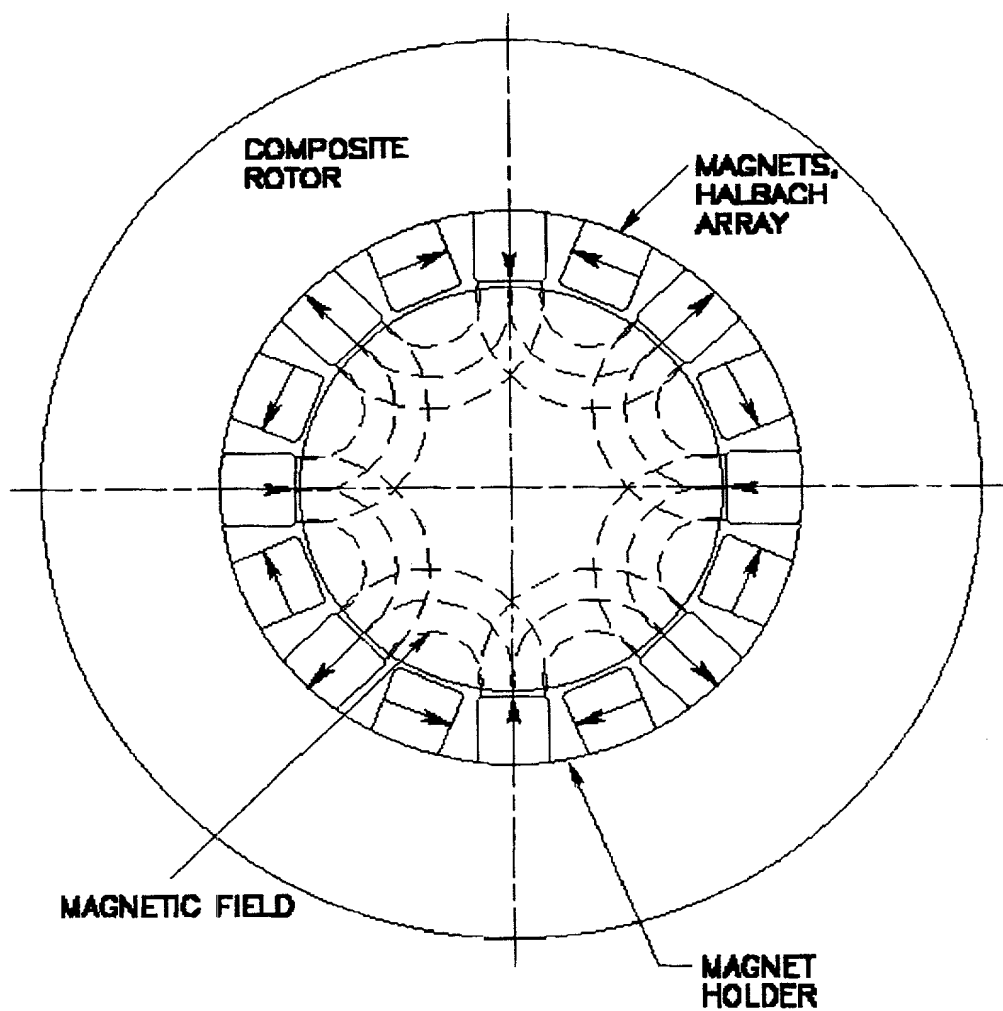

1C
FIGURE 1A: MULTIPLE POLE HALBACH ARRAY WITH
SQUARE SEGMENT MAGNETS

TRINITY PROPRIETARY INFORMATION

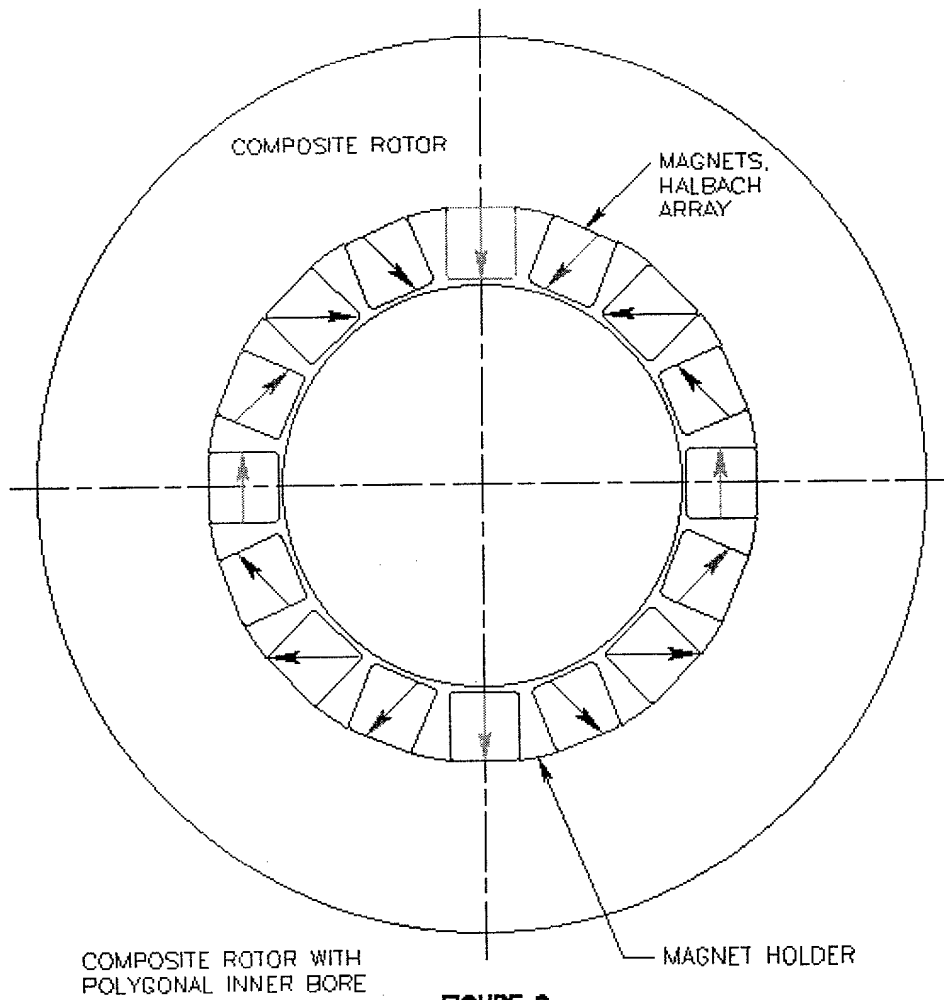


FIGURE 2

FIGURE 2: SQUARE MAGNETS IN HALBACH ARRAY WITH INTEGRAL MAGNET HOLDER INSIDE A POLYGONAL BORE

TRINITY PROPRIETARY INFORMATION

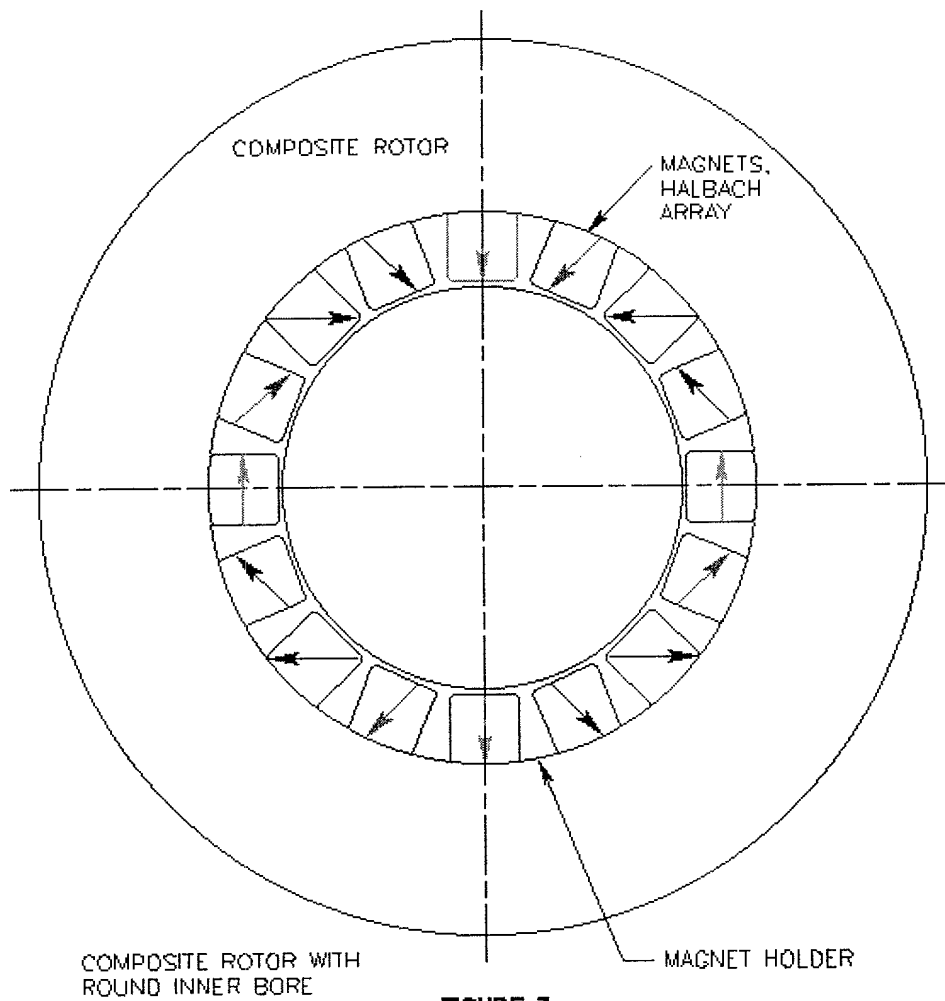


FIGURE 3

FIGURE 3: SQUARE MAGNETS IN HALBACH ARRAY WITH INTEGRAL
MAGNET HOLDER INSIDE A ROUND BORE

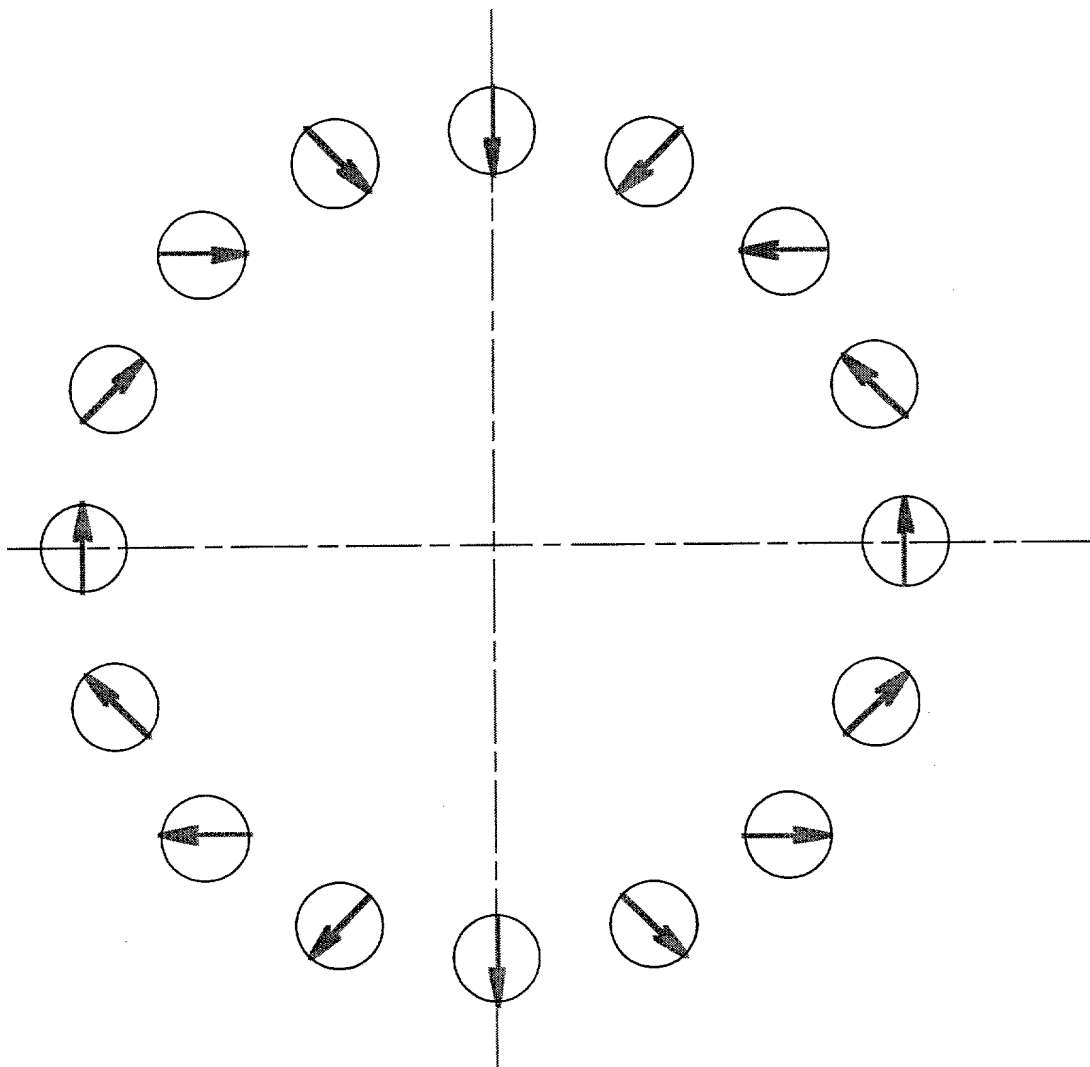


FIGURE 4: DIPOLE HALBACH ARRAY WITH CYLINDRICAL MAGNET SEGMENTS

005230 "44T64960

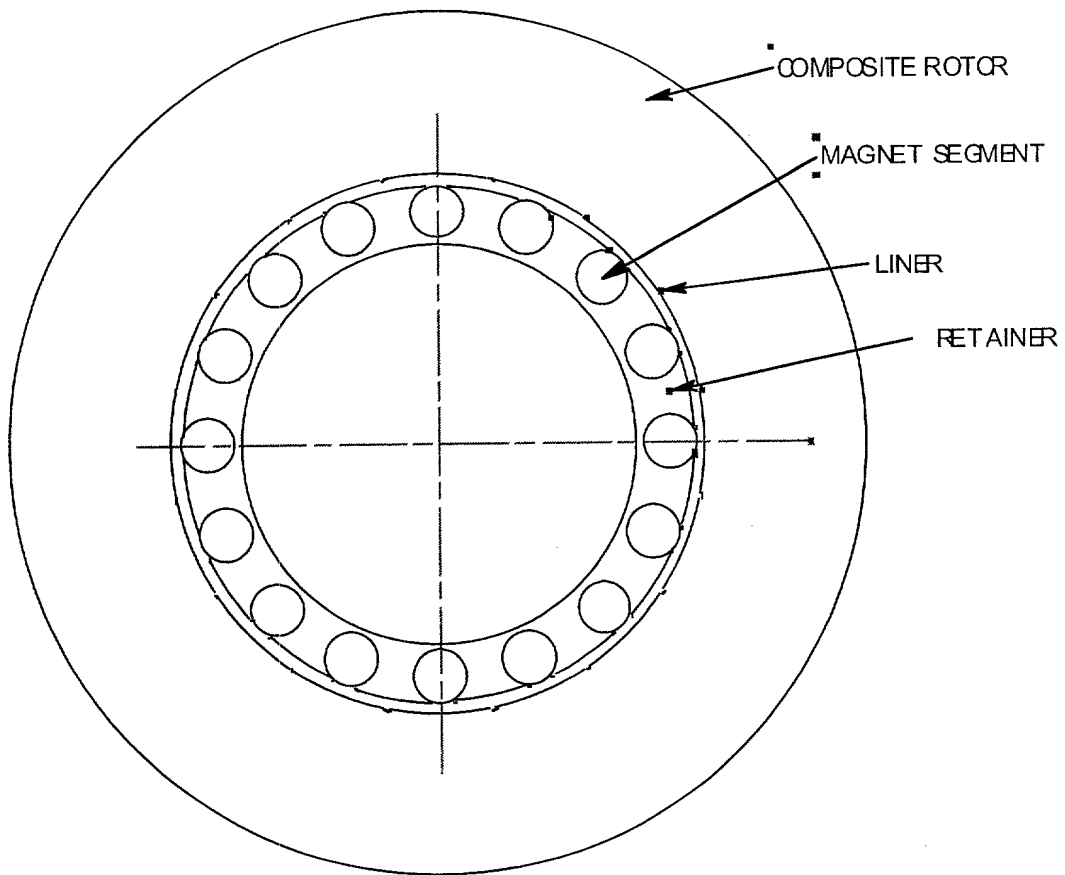


FIGURE 5: THIN LINER AND RETAINER

000000-44-0500

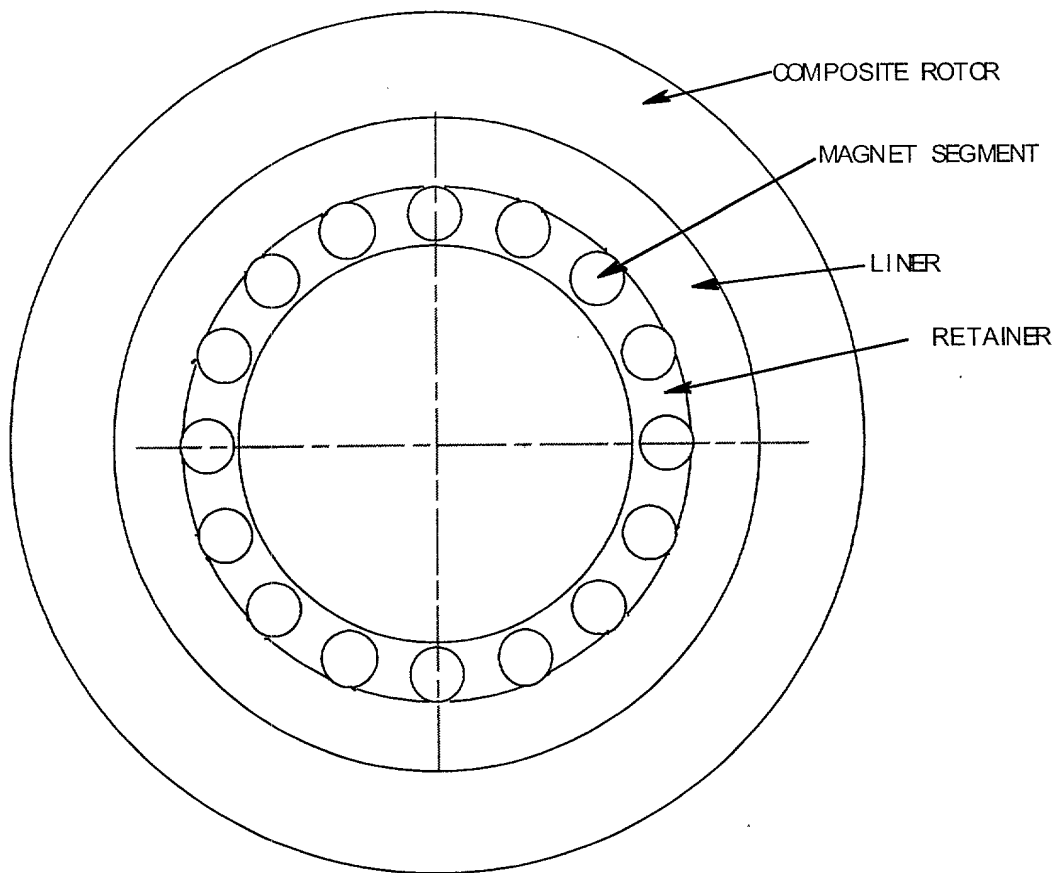


FIGURE 6: THICK LINER, SEPRATE RETAINER

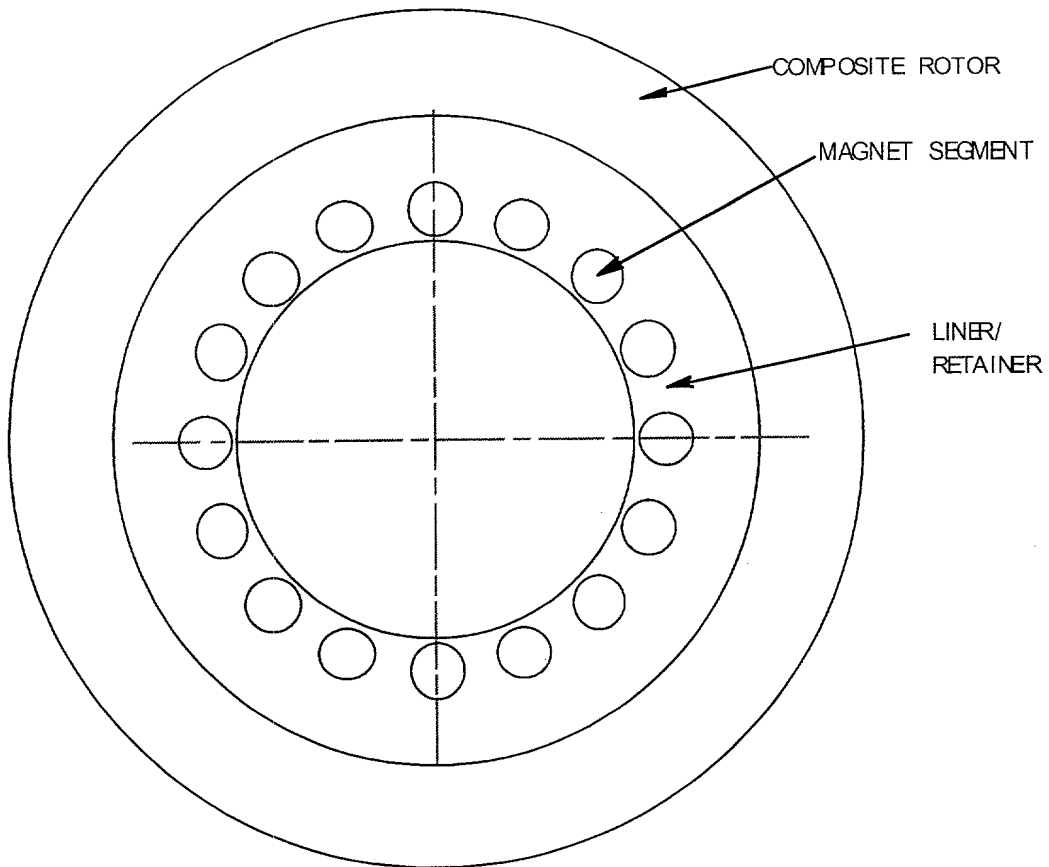


FIGURE 7: COMBINED LINER RETAINER

005200-11764960

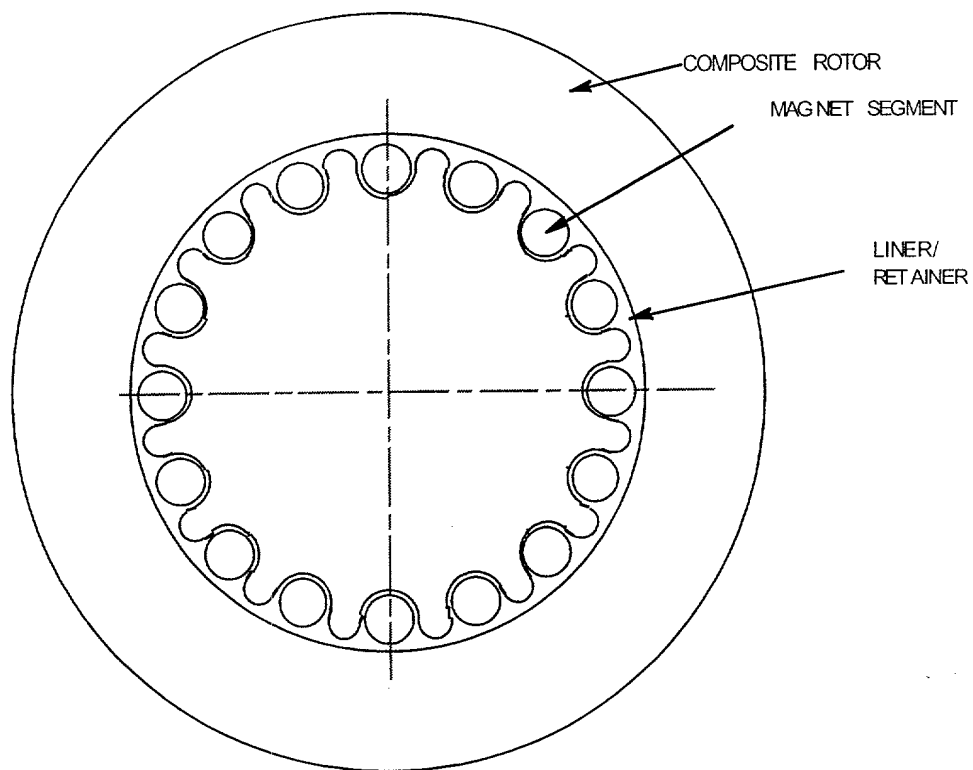


FIGURE 8: CONTOURED LINER/RETAINER

005280" 44T64560

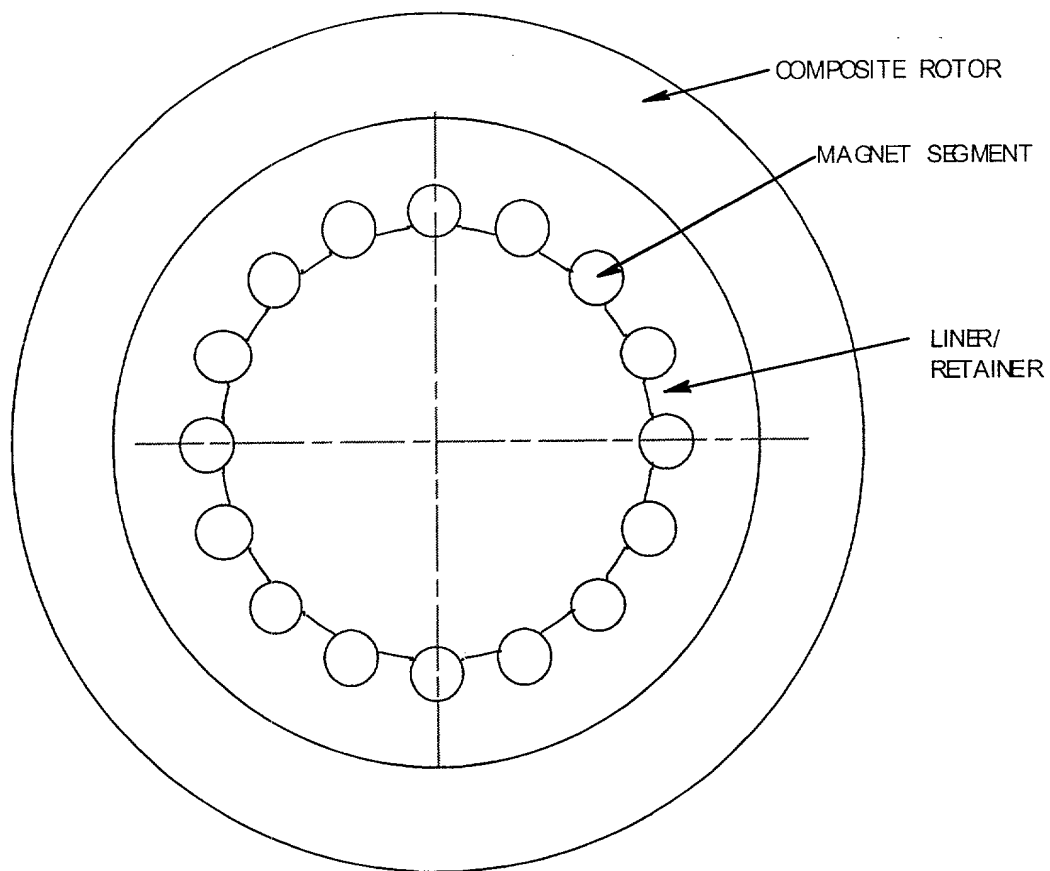


FIGURE 9: PARTIALLY SURROUNDING LINER/RETAINER

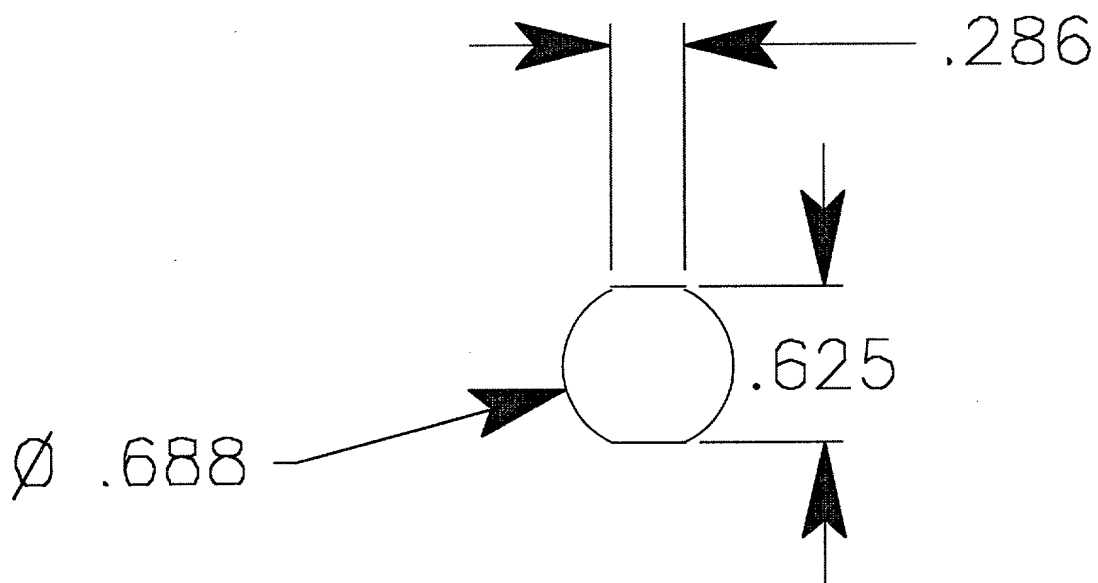


FIGURE 10: MAGNET SEGMENT WITH ANTIROTATION FLATS

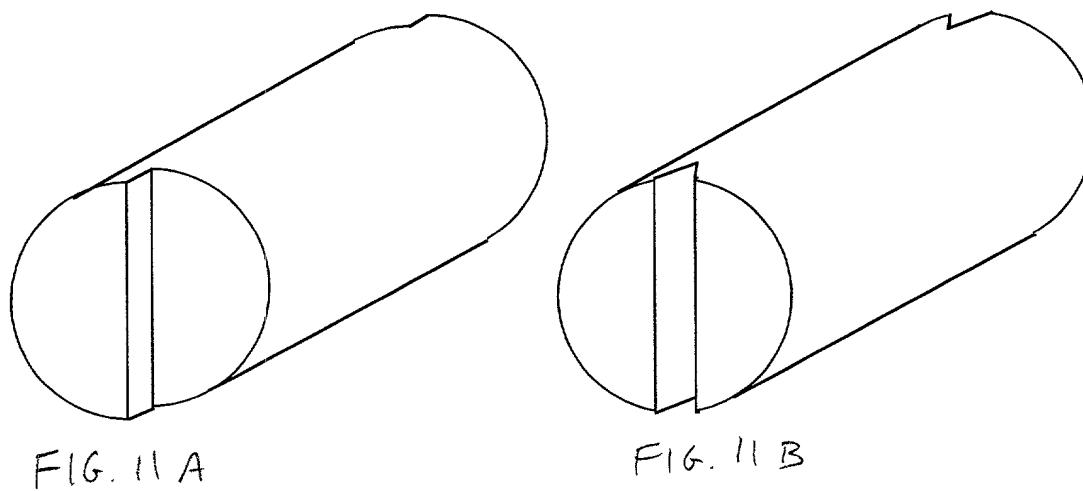


FIGURE 11: ANTIROTATION FEATURES ON ENDS OF MAGNET (STEP OR GROOVE)

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

PERMANENT MAGNET ARRAY AND MAGNET HOLDER FOR FLYWHEEL MOTOR/GENERATOR

the specification of which (check one) X is attached hereto or ___ was filed on ___ as Application No. ___ and was amended on ___ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
			Yes	No
_____	_____	Day/Month/Year Filed	_____	_____
Number	Country			
_____	_____	Day/Month/Year Filed	_____	_____
Number	Country			

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) below.

<u>60/151,236</u>	<u>August 27, 1999</u>
Application Number	Filing Date
<u>60/152,453</u>	<u>September 3, 1999</u>
Application Number	Filing Date

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

_____	_____	Status: Patented, Pending, Abandoned
Application Number	Filing Date	
_____	_____	Status: Patented, Pending, Abandoned
Application Number	Filing Date	

005230" 44T54960

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under 18 U.S.C. § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor Michael Kim

Inventor's signature _____

Date _____

Residence 3320 Arbor Drive, Pleasanton, CA 94566

Citizenship USA

Post Office Address 3320 Arbor Drive, Pleasanton, CA 94566

Full name of second joint inventor, if any, Donald A. Bender

Inventor's signature _____

Date _____

Residence 524 Columbia Creek Dr, San Ramon, CA 94583

Citizenship USA

Post Office Address 524 Columbia Creek Dr, San Ramon, CA 94583
